

Premier Quatro Fully Functional Repeater (QT-REP)



Description


The QT-REP is supplied with an integral power supply and is connected to the Quatro panel with fireproof communication cable.

The QT-REP can be programmed to repeat fire & fault events from one panel or programmed to repeat from a group of networked Quatro panels.

Controls

- Buzzer Mute
- Start Sounders
- Stop Sounders
- Reset
- Menu Keys

Dimensions (mm) & Weight (kg)

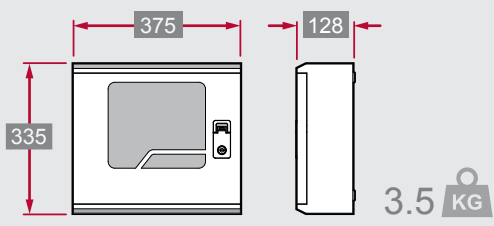

Features

- 40 character 4 line LCD display
- Up to 32 on a network (or a combination of panels and repeaters up to a max of 32)
- Onboard power supply/charger

Technical Specification

Model	QT-REP
Part No.	37-520
System Voltage	21 - 30 Vdc
Current	90 mA
Connection	RS485
Max Battery Size	7Ah
Dimensions	375 x 335 x 125 mm
IP Rating	IP 30

Flush Mount Kits

REP-FMB (Part No. 26-308)	REP-FMB/SS (Part No. 26-311)
Quatro Repeater Flush Mount Kit	Quatro Repeater Stainless Steel Flush Mount Kit

Dimensions of Wall Opening: 340mm (H) x 383mm (W) x 165mm (D)