

Addressable Call Points

(ZT-CP4/AD & ZT-CP4/WP/AD)



ZT-CP4/AD



ZT-CP4/WP/AD

Description

The ZT-CP4/AD and ZT-CP4/WP/AD addressable call points are unique in that they mimic the feel of breaking glass whilst offering the user the benefits and environmental advantages of a re-settable operating element.



Addressing these call points is via an 8 way dip switch on the back of the call point. The design also provides a visual LED indication to confirm alarm activation.



A special Polycarbonate cover (CP4-CV) is available for extra protection against accidental activation and thus allowing the unit to operate as a double action call point. This must be ordered separately.



Dimensions (mm) & Weight (g)

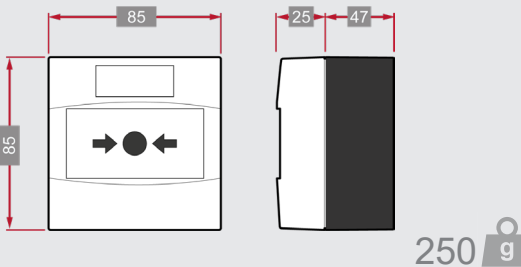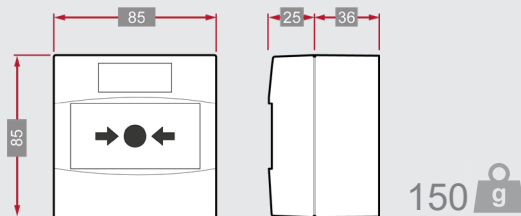

Features

- Very high visibility of the alarm condition
- New efficient and reliable mechanism
- High impact resistant ABS glass fibre material
- Approved to EN 54-11

Technical Specification



Model	ZT-CP4/AD	ZT-CP4/WP/AD
Input Voltage	17-28V DC	
Element Type	Resettable	
Quiescent Current	600µA Maximum	
Alarm Current	2.5mA Maximum	
Operating Temperature	-20 degrees C to +60 degrees C	
Max Humidity	95%RH Non-Condensing	
IP Rating	IP32	IP67
Size (W x H x Dmm)	85 x 85 x 61	85 x 85 x 72

Optional Extras

Order Code	Description
CP4-CV	Call Point Protective Cover
CP4-KEY	Call Point Reset Key